

# EXAIR®

MANUFACTURING INTELLIGENT COMPRESSED AIR PRODUCTS SINCE 1983



COAT



COOL



CONSERVE



CLEAN



CONVEY

## 36 CATALOG

**BETE®**  
PERFORMANCE SPRAY ENGINEERING  
DIVISION OF EXAIR

|                                                   |        |
|---------------------------------------------------|--------|
| MF MicroWhirl Misting & Fogging Nozzles .....     | pg 107 |
| NF Standard Fan Nozzles .....                     | pg 108 |
| TF Full Cone Spray Nozzles .....                  | pg 109 |
| MP MaxiPass Maximum Free Passage Nozzles .....    | pg 110 |
| WL Full Cone Nozzles .....                        | pg 111 |
| HC HydroClaw & TW Spiral Tank Washing Nozzles ... | pg 112 |
| HWS2 HydroWhirl Stinger & HWM HydroWhirl Mini     | pg 113 |
| HWP HydroWhirl Poseidon & HWD HydroWhirl Disc     | pg 114 |



YOU REQUESTED THIS CATALOG AND PRICE LIST.  
PLEASE SEE MAILING LABEL ON BACK COVER.



Stay up to date by visiting our website and take advantage of the information and services we didn't have room to display in this catalog.



### Where you can

- **Chat live** with our problem solving, technical expert Application Engineers
- **Watch product videos** to learn more about the features and benefits of our engineered products
- Quickly **order online** with a purchase order or credit card (US & Canada)
- **Access product presentation slides** you can use to educate others
- Find **International Distributors** all across the world



### Access our Knowledge Base in "Resources"

- Download **3D models** and CAD drawings in multiple formats to place into your drawings
- Calculate **air savings and ROI** to see how quickly EXAIR products will pay off
- Search our **Case Study Library & Applications database** and become familiar with how our products solve problems
- Use our **product FAQ's** for quick access to our most common questions
- Learn about our free **Efficiency Lab** service and use it to **determine air and money savings** you can achieve when installing EXAIR engineered solutions
- Collect compressed air data and pipe sizing recommendations
- Find **Flow, Force and Heat conversions**



### Visit our PDF library and download

- Electronic files of the entire catalog or individual sections
- Installation and Maintenance Guides on every EXAIR product
- Our current price list to have all product prices in one convenient location


### Follow our blog for 5 new entries a week and learn

- Details and installations of widely varied applications
- The methodology and results of critical mathematical formulas which help determine money savings, air savings, performance benefits and more
- New product releases before they reach our catalog or website
- More about EXAIR, our team and community involvement
- Go to [blog.exair.com](http://blog.exair.com)



### Make social connections

- Watch over 150 videos on EXAIR's YouTube Channel and see product features and benefits, applications, Tips & Tricks, How-to, and our team members.
- Follow our Company on X@EXAIR or our Application Engineers and learn more about promotions, updates on manufacturing, engineering and international industry perspective.
- Connect with us on Facebook at [facebook.com/exair](https://facebook.com/exair) or follow us on Linked In, Twitter and Instagram.

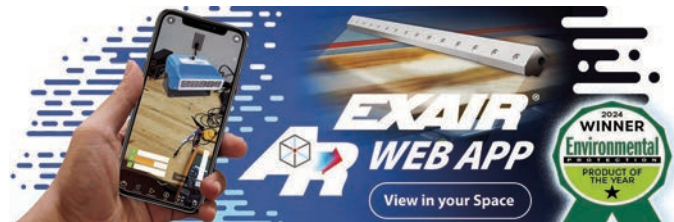

### EXAIR's Augmented Reality Mobile Application

- Browse EXAIR's product offerings and pull up live 3D models
- Orient the model to see how it will fit in your space
- Tap hotspots to learn more about it
- Click the link to purchase the product



## EXAIR Optimization

Minimize compressed air use and detect wasteful leaks

|                                 |    |
|---------------------------------|----|
| 6 Steps to Optimization .....   | 6  |
| Electronic Flow Control .....   | 7  |
| Digital Flowmeter .....         | 10 |
| Digital Sound Level Meter ..... | 17 |
| Ultrasonic Leak Detector .....  | 18 |



## Air Knives

Blowoff, clean, dry and cool with less noise and air consumption

|                                           |    |
|-------------------------------------------|----|
| Super Air Knife .....                     | 20 |
| Compare Blowoffs .....                    | 23 |
| Explanation of Materials .....            | 26 |
| Universal Air Knife Mounting System ..... | 29 |
| Plumbing Kits .....                       | 29 |
| Standard Air Knife .....                  | 33 |
| Full-Flow Air Knife .....                 | 36 |



## Air Wipes

Blowoff, dry, clean and cool pipe, cable, extruded shapes and hose

|                          |    |
|--------------------------|----|
| Super Air Wipes .....    | 38 |
| Standard Air Wipes ..... | 42 |



## Air Amplifiers

Vent, exhaust, cool, dry and clean - with no moving parts

|                                 |    |
|---------------------------------|----|
| Super Air Amplifiers .....      | 46 |
| Adjustable Air Amplifiers ..... | 50 |



## Air Nozzles and Jets

Reduce noise levels and air costs on blowoff operations

|                                              |    |
|----------------------------------------------|----|
| Air Nozzles .....                            | 52 |
| Air Nozzle Comparison Chart .....            | 54 |
| Super Air Nozzles .....                      | 55 |
| Flat Super Air Nozzles .....                 | 57 |
| Super Air Scraper .....                      | 57 |
| Back Blow Air Nozzles .....                  | 59 |
| Safety Air Nozzles .....                     | 60 |
| Adjustable Air Nozzles .....                 | 60 |
| Air Jets .....                               | 61 |
| High Force Air Nozzles .....                 | 63 |
| High Force Air Nozzle Comparison Chart ..... | 63 |
| High Force Flat Super Air Nozzles .....      | 63 |
| High Force Super Air Nozzles .....           | 64 |
| Super Air Nozzle Clusters .....              | 67 |
| Stay Set Hoses .....                         | 67 |
| Swivel Fittings .....                        | 68 |
| Blowoff Systems .....                        | 69 |



## Air Atomizing Nozzles

All stainless steel construction for durability and corrosion resistance

|                                          |           |
|------------------------------------------|-----------|
| <b>1/8 NPT Atomizing Nozzles .....</b>   | <b>71</b> |
| Internal Mix Narrow Angle Round .....    | 71        |
| Internal Mix Wide Angle Round .....      | 72        |
| Internal Mix Flat Fan .....              | 73        |
| External Mix Narrow Angle Flat Fan ..... | 74        |
| Siphon Fed Round .....                   | 75        |
| Siphon Fed Flat Fan .....                | 76        |
| <b>1/4 NPT Atomizing Nozzles .....</b>   | <b>77</b> |
| Internal Mix Narrow Angle Round .....    | 77        |
| Internal Mix Wide Angle Round .....      | 78        |
| Internal Mix Flat Fan .....              | 79        |
| Internal Mix Deflected Flat Fan .....    | 80        |
| Internal Mix 360° Hollow Circular .....  | 80        |
| External Mix Round .....                 | 81        |
| External Mix Narrow Angle Flat Fan ..... | 82        |
| External Mix Wide Angle Flat Fan .....   | 83        |
| Siphon Fed Round .....                   | 84        |
| Siphon Fed Flat Fan .....                | 85        |
| <b>1/2 NPT Atomizing Nozzles .....</b>   | <b>86</b> |
| Internal Mix Narrow Angle Round .....    | 86        |
| Internal Mix Wide Angle Round .....      | 87        |
| Internal Mix Flat Fan .....              | 88        |
| Internal Mix 360° Hollow Circular .....  | 89        |
| External Mix Narrow Angle Flat Fan ..... | 90        |
| Siphon Fed Round .....                   | 91        |



## No Drip Air Atomizing Nozzles

Eliminate drips to conserve valuable liquids and improve product finishes.

|                                                  |           |
|--------------------------------------------------|-----------|
| <b>1/8 NPT No Drip Atomizing Nozzles .....</b>   | <b>93</b> |
| No Drip Internal Mix Narrow Angle Round .....    | 93        |
| No Drip Internal Mix Wide Angle Round .....      | 93        |
| No Drip Internal Mix Flat Fan .....              | 94        |
| No Drip External Mix Narrow Angle Flat Fan ..... | 95        |
| No Drip Siphon Fed Round .....                   | 96        |
| No Drip Siphon Fed Flat Fan .....                | 96        |
| <b>1/4 NPT No Drip Atomizing Nozzles .....</b>   | <b>93</b> |
| No Drip Internal Mix Narrow Angle Round .....    | 93        |
| No Drip Internal Mix Wide Angle Round .....      | 93        |
| No Drip Internal Mix Flat Fan .....              | 94        |
| No Drip Internal Mix Deflected Flat Fan .....    | 94        |
| No Drip Internal Mix 360° Hollow Circular .....  | 94        |
| No Drip External Mix Round .....                 | 95        |
| No Drip External Mix Narrow Angle Flat Fan ..... | 95        |
| No Drip External Mix Wide Angle Flat Fan .....   | 95        |
| No Drip Siphon Fed Round .....                   | 96        |
| No Drip Siphon Fed Flat Fan .....                | 96        |
| <b>1/2 NPT No Drip Atomizing Nozzles .....</b>   | <b>93</b> |
| No Drip Internal Mix Narrow Angle Round .....    | 93        |
| No Drip Internal Mix Wide Angle Round .....      | 93        |
| No Drip Internal Mix Flat Fan .....              | 94        |
| No Drip Internal Mix 360° Hollow Circular .....  | 94        |
| No Drip External Mix Narrow Angle Flat Fan ..... | 95        |
| No Drip Siphon Fed Round .....                   | 96        |



## Liquid Atomizing Spray Nozzles

Stainless-steel nozzles to atomize pressurized liquids. No air required.

|                                                     |     |
|-----------------------------------------------------|-----|
| OmniStream Cone Nozzles, 1/4 NPT .....              | 98  |
| OmniStream Cone Nozzles, 3/8 NPT .....              | 99  |
| OmniStream Cone Nozzles, 1/2 NPT .....              | 100 |
| <b>NEW</b> HollowStream Cone Nozzles, 1/8 NPT ..... | 101 |
| HollowStream Cone Nozzles, 1/4 NPT .....            | 102 |
| HollowStream Cone Nozzles, 3/8 NPT .....            | 103 |
| HollowStream Cone Nozzles, 1/2 NPT .....            | 104 |
| <b>NEW</b> PowerStream Cone Nozzles, 1/8 NPT .....  | 105 |



## BETE Hydraulic Nozzles

Industry leading spray technology

|                                                     |     |
|-----------------------------------------------------|-----|
| MW MicroWhirl Misting & Fogging Nozzles .....       | 107 |
| NF Standard Fan Nozzles .....                       | 108 |
| TF Full Cone Spray Nozzles .....                    | 109 |
| MP MaxiPass Maximum Free Passage Nozzles .....      | 110 |
| WL Full Cone Nozzles .....                          | 111 |
| HC HydroClaw & TW Spiral Tank Washing Nozzles ..... | 112 |
| HWS HydroWhirl Stinger & HWM HydroWhirl Mini .....  | 113 |
| HWP HydroWhirl Poseidon & HWD HydroWhirl Disc ..... | 114 |

# 115

## Safety Air Guns

Safety air guns use engineered air nozzles for high performance

|                                           |     |
|-------------------------------------------|-----|
| Chip Shields.....                         | 116 |
| VariBlast® Precision Safety Air Guns..... | 117 |
| VariBlast® Compact Safety Air Guns.....   | 118 |
| Soft Grip Safety Air Guns.....            | 120 |
| Soft Grip Super Air Scraper.....          | 123 |
| Heavy Duty Safety Air Guns.....           | 124 |
| Back Blow Safety Air Guns.....            | 125 |
| TurboBlast® Safety Air Guns.....          | 126 |
| Super Blast Safety Air Guns.....          | 128 |

# 130

## Gen4® Static Eliminators

Eliminate static electricity, dust and shock hazard

|                                                  |     |
|--------------------------------------------------|-----|
| Gen4® Super Ion Air Knife.....                   | 132 |
| Static Meter.....                                | 134 |
| Gen4® Standard Ion Air Knife.....                | 138 |
| Gen4® Ionizing Bars.....                         | 140 |
| Gen4® Super Ion Air Wipes.....                   | 142 |
| Gen4® Ion Air Cannon.....                        | 144 |
| Gen4® Ion Air Gun.....                           | 146 |
| Gen4® Ion Air Jet/Gen4 Stay Set Ion Air Jet..... | 148 |
| Gen4® Ionizing Point.....                        | 150 |
| Gen4® Power Supplies.....                        | 151 |
| Intellistat® Ion Air Gun.....                    | 152 |
| Intellistat® Ion Air Nozzle.....                 | 154 |
| Varistat Bench Ionizer.....                      | 156 |

# 158

## E-Vac® Vacuum Generators

Vacuums for lifting, clamping, mounting and placement

|                                   |     |
|-----------------------------------|-----|
| How to Build an E-Vac System..... | 159 |
| In-Line.....                      | 160 |
| Adjustable.....                   | 163 |
| Vacuum Cups.....                  | 165 |

# 169

## Air Operated Conveyors

Convey parts, materials and waste - with no moving parts

|                               |     |
|-------------------------------|-----|
| Line Vac.....                 | 169 |
| Threaded Line Vac.....        | 175 |
| Heavy Duty Line Vac.....      | 178 |
| Sanitary Flange Line Vac..... | 180 |
| Light Duty Line Vac.....      | 182 |

# 184

## Industrial Housekeeping

Reliable vacuums for chip removal, liquid transfer and cleaning

|                                    |     |
|------------------------------------|-----|
| EasySwitch® Wet-Dry Vac.....       | 185 |
| Reversible Drum Vac.....           | 187 |
| High Lift Reversible Drum Vac..... | 189 |
| Chip Trapper.....                  | 191 |
| High Lift Chip Trapper.....        | 193 |
| Chip Vac.....                      | 195 |
| Heavy Duty Dry Vac.....            | 197 |
| Heavy Duty HEPA Vac.....           | 199 |
| Vac-u-Gun.....                     | 201 |

# 203

## Vortex Tubes & Spot Cooling

Cold air for industrial spot cooling problems

|                             |     |
|-----------------------------|-----|
| Vortex Tubes.....           | 203 |
| Adjustable Spot Cooler..... | 211 |
| Mini Cooler.....            | 214 |

# 215

## Cold Gun Aircoolant Systems

Cool machining operations with clean, cold air

# 219

## Cabinet Cooler® Systems

Cool and purge NEMA 12, 4 and 4X electrical control panels

|                                         |     |
|-----------------------------------------|-----|
| How it Works.....                       | 220 |
| Selecting the Right Model.....          | 220 |
| Special Cabinet Coolers.....            | 221 |
| Calculating Heat Load.....              | 223 |
| Cabinet Cooler Sizing Guide.....        | 224 |
| NEMA 12 Models.....                     | 226 |
| NEMA 4 Models.....                      | 227 |
| NEMA 4X Models.....                     | 228 |
| Cabinet Cooler System Accessories.....  | 229 |
| Hazardous Location Cabinet Coolers..... | 230 |
| ATEX Cabinet Coolers.....               | 232 |

# 234

## Accessories

Mufflers, filters, regulators, valves, swivel fittings and more

|                                       |     |
|---------------------------------------|-----|
| Filters.....                          | 234 |
| Regulators.....                       | 235 |
| Silencing Mufflers.....               | 236 |
| Valves, Swivels, Thermostats.....     | 238 |
| Magnetic Bases, Stay Sets, Hoses..... | 239 |
| Air Hoses.....                        | 239 |
| Fittings.....                         | 240 |
| Receiver Tank.....                    | 240 |



Catalog item orders received before 2 pm EDT/EST are generally shipped from Cincinnati, Ohio on the same day. You can expect delivery within 1-4 days depending on your location.



# Terms and Conditions (U.S. and Canada Only)

**Terms:** Net 30 days upon credit approval, Visa, MasterCard, Discover and American Express.



Cards

**ICC (International Chamber of Commerce)**  
**INCOTERM 2020:**

**Delivery**

EX WORKS (EXAIR, 11510 Goldcoast Dr., Cincinnati, Ohio 45249, USA.)

All cataloged products are shipped from stock, via U.P.S. within 24 hours after receipt of order. Priority shipment is available upon request.

**Ordering:**

Call 1-800-903-9247 or +1-513-671-3322

Worldwide 7:00 a.m. to 4:00 p.m. ET (Mon. - Fri.)

Fax toll free 1-866-329-3924 or

Worldwide +1-513-671-3363

E-mail: [orders@exair.com](mailto:orders@exair.com)

Secure website: [www.exair.com](http://www.exair.com)

**Remit to address (payments only):**

EXAIR Location 00766, Cincinnati, Ohio 45264-0766

**Tax:**

Sales and use tax, where applicable, are not included.

**Technical Assistance:**

Please call our Application Engineering Department,

1-800-90-EXAIR (1-800-903-9247)

e-mail at [techhelp@exair.com](mailto:techhelp@exair.com).



**Warranty:**

5 Year "Built To Last" Warranty against defects in workmanship and materials on all compressed air products\*. Defective products must be returned freight prepaid for repair or replacement at our option. This warranty applies under conditions of normal use, but does not apply to defects that result from intentional damage, negligence, unreasonable use, wear or exposure.

\* 5 Year Warranty applies to compressed air products only.  
A 1 Year Warranty applies to all accessories and electrically powered products.

**EXAIR's Unconditional Guarantee:**

Extends to all U.S. and Canadian customers and includes invoiced U.P.S. Ground Service shipping charges. Products returned after the 30 day guarantee period are subject to a 15% restocking charge. Products must be returned freight prepaid.



**Copyright Restrictions:**

The content of the EXAIR Catalog, including all photos, graphics, drawings and arrangements are proprietary to EXAIR LLC and are protected by the United States and international copyright and trademark laws. You are authorized to use the contents of the EXAIR Catalog for personal use or as it relates to your role as a current or prospective customer of EXAIR. The contents of this catalog may not be copied or modified for any type of publication or distribution without the prior written consent of EXAIR. The content of the EXAIR Catalog is the intellectual property solely of EXAIR with no rights transferred to other parties. No part of this catalog may be reproduced for any commercial purposes without the express authorization in writing by EXAIR.

**Trademarks:**

"EXAIR.com", "EXAIR", "Cabinet Cooler", "E-Vac", "Intelligent Compressed Air", "VariBlast", "Gen4", "Intellistat", "EasySwitch", "TurboBlast", "Varistat" and "Compressed Air Intelligence" are registered trademarks of the EXAIR LLC. The EXAIR logo, product names, designs and descriptive phrases are trademarked by EXAIR. These trademarks may not be used without prior written permission of EXAIR.

EXAIRLogger, EFC, Digital Flowmeter, Hot Tap Digital Flowmeter, Digital Sound Level Meter, High Power Cold Gun, Super Air Knife, Standard Air Knife, Full-Flow Air Knife, Air Cannon, Super Air Amplifier, Adjustable Air Amplifier, Super Air Nozzle, Micro Air Nozzle, High Power Safety Air Nozzle, Stay Set Hose, Soft Grip Super Air Scraper, Super Air Scraper, Super Blast Safety Air Gun, Super Air Wipe, Heavy Duty Line Vac, Light Duty Line Vac, Sanitary Flange Line Vac, Threaded Line Vac, OmniStream, PowerStream, HollowStream, Standard Air Wipe, Super Ion Air Knife, Standard Ion Air Knife, Super Ion Air Wipe, Ion Air Cannon, Ion Air Gun, Ion Air Jet, Ionizing Point, Stay Set Ion Air Jet, Line Vac, Chip Vac, Heavy Duty Dry Vac, Heavy Duty HEPA Vac, Reversible Drum Vac, High Lift Reversible Drum Vac, Chip Trapper, High Lift Chip Trapper, Vac-u-Gun, Deep Hole Vac-u-Gun, Air Disk, Air Stik, Mini Cooler, Cold Gun Aircoolant System, and ETC are trademarks of EXAIR LLC.

**EXAIR.com**

11510 Goldcoast Dr.

Cincinnati, Ohio 45249-1621

**Phone Number:** (513) 671-3322

**Fax Number:** (513) 671-3363

**E-mail:** [techhelp@exair.com](mailto:techhelp@exair.com)

**Web Site:** [www.exair.com](http://www.exair.com)



Intelligent Compressed Air® products are identified throughout this catalog that can help your plant save tens of thousands of dollars over the course of a single year. *The Best Practices for Compressed Air Systems* manual published by the Compressed

Air Challenge® recommends products like the Super Air Knife™, Super Air Amplifier™, and the family of Super Air Nozzles™ for energy conservation. Many of the products shown offer unique ways to solve common industrial problems using compressed air. Compressed Air Challenge is a registered trademark of Compressed Air Challenge, Inc.



EXAIR has partnered with Energy Star, a voluntary program of the U.S. Department of Energy and the Environmental Protection Agency. Energy Star offers energy efficient solutions to help save money while protecting the environment for future generations. EXAIR has implemented improved energy management practices and technologies throughout our facility, including energy efficient lighting, HVAC systems, and electronic thermostats. EXAIR's participation in this program underscores our commitment to conserving energy.

EXAIR products are subject to ongoing development. Specifications are subject to change without notice.

Some products in this catalog are covered by U.S. Patent #5402938, #8153001, #8268179, #D903,817, #10,779,698, #9156045 and 11,969,134, others may be U.S. Patent Pending. EU Regd. Des. No.00770318-0001 and No. 009025463-0001 © Mexico No.60723; Canada No.194141, UK Registered Design No. 6211314

Copyright ©2025 EXAIR LLC. All Rights Reserved.



## Cabinet Cooler® Systems

**An INTELLIGENT  
COMPRESSED AIR®  
Product**

# Cabinet Cooler® Systems

**Stop electronic control downtime  
due to heat, dirt, and moisture!**

**Cabinet Coolers maintain NEMA 4,  
4X, and 12 integrity.**

**All Cabinet Coolers are**



**and/or C € compliant!**



### What is an EXAIR Cabinet Cooler System?



A low cost, reliable way to cool and purge electronic control panels. EXAIR Cabinet Coolers incorporate a vortex tube to produce cold air from compressed air - with no moving parts. The compact Cabinet Cooler can be installed in minutes through a standard electrical

knockout. NEMA 12, 4, and 4X (IP54 and IP66) Cabinet Coolers that match the NEMA rating of the enclosure are available in many cooling capacities for large and small control panels.

### Why EXAIR Cabinet Cooler Systems?

The vortex tubes incorporated in the EXAIR Cabinet Coolers are constructed of stainless steel. The wear, corrosion and oxidation resistance of stainless steel assures long life and maintenance free operation. All Cabinet Coolers are UL Listed, UL Classified and/or CE compliant.



### Applications

- Programmable controllers
- Line control cabinets
- Motor control centers
- Relay panels
- NC/CNC systems
- Modular control centers
- CCTV cameras
- Computer cabinets
- Laser housings
- Electronic scales
- Food service equipment

### Advantages

- Low cost
- Compact
- Cooling capacities to 5,600 Btu/hr. (1,641 Watts)
- Quiet
- Install in minutes
- Maintain NEMA 12, 4 and 4X integrity (IP54 and IP66)
- Stabilize enclosure temperature and humidity
- No CFC's
- No moving parts-maintenance free
- Mount in standard electrical knockout

- Stop nuisance tripping
- Stop heat damage
- Eliminate fans and filters
- Eliminate lost production
- Stop circuit drift
- Stop dirt contamination
- Provide washdown protection

### Special Cabinet Coolers

- High temp. models for ambients up to 200°F (93°C) available
- Type 316 stainless steel available
- Purge models for non-hazardous locations available



11510 Goldcoast Drive • Cincinnati, OH 45249-1621 • Phone (513) 671-3322  
FAX (513) 671-3363 • E-mail: techhelp@exair.com • www.exair.com


**Order Direct**  
We Ship From Stock

219

Cabinet  
Coolers




# Cabinet Cooler® Systems

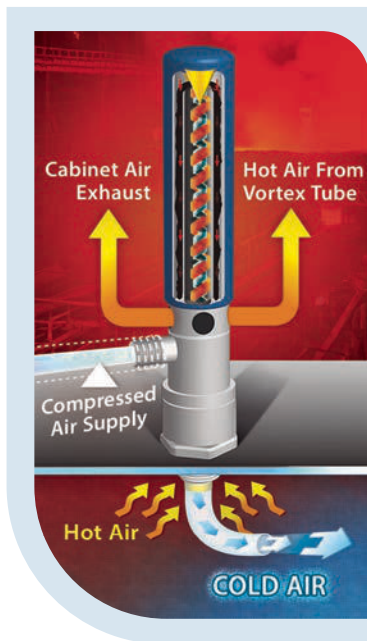

## How The Cabinet Cooler Works

Compressed air enters the vortex tube powered Cabinet Cooler and is converted into two streams, one hot and one cold. (For more information on vortex tube operation, see page 204.) Hot air from the vortex tube is muffled and exhausted through the **vortex tube exhaust**. The cold air is discharged into the control cabinet through the cold air distribution kit. The displaced hot air in the cabinet rises and exhausts to atmosphere through the **cabinet air exhaust** at a slight positive pressure. Thus, the control cabinet is both cooled and purged with cool, clean air. **Outside air is never allowed to enter the control panel.**

## Mounting

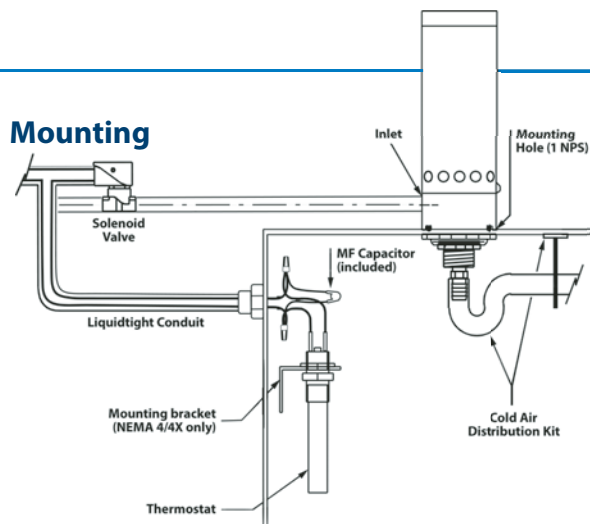

The Cabinet Cooler mounts to the enclosure through a drilled hole or electrical knockout. The NEMA 12 (IP54) Cabinet Coolers may be mounted on the top or side of the panel. NEMA 4 and 4X (IP66) Cabinet Coolers must be mounted on the top of the panel or on the side of the panel using one of our Side Mount Kits (See page 229).

## Selecting The Right Model – Know Your System Options

Each different NEMA rated Cabinet Cooler system is available with a thermostat control or as a continuous operation system. Each of these systems will include a water-dirt filter separator to prevent water condensate and dirt from entering your enclosure, and a cold air distribution kit used to direct the air for circulation or on to hot spots. EXAIR also manufactures Cabinet Cooler systems for difficult environments. We have provided additional information on our Cabinet Cooler systems suitable for high temperature environments, Non-Hazardous purge environments, Type 316SS material coolers for highly corrosive environments, Hazardous Location and ATEX environments.

## NEMA Rating

The first step to solving your overheating problem is to identify the NEMA integrity your enclosure will require. To the right is an explanation to help you determine which NEMA integrity Cabinet Cooler system we should ship to you.

## Thermostat Control

The thermostat control systems are the most efficient way to operate a Cabinet Cooler. They save air by activating the cooler only when internal temperatures approach critical levels. Thermostat controlled cooler systems are the best option when experiencing fluctuating heat loads caused by environment or seasonal changes. The standard thermostat control systems include an adjustable thermostat factory set at 95°F (35°C).



Cabinet Cooler Systems with ETC provide temperature control.

## Environmental Considerations

**NEMA 12 (IP54) Cabinet Coolers** (dust-tight, oil-tight) are ideal for general industrial environments where no liquids or corrosives are present.

**NEMA 4 (IP66) Cabinet Coolers** (dust-tight, oil-tight, splash resistant, indoor/outdoor service) incorporate a low pressure relief valve for both the vortex tube and cabinet air exhaust. This valve closes and seals when the cooler is not operating **to maintain the integrity of a NEMA 4 enclosure.**

**NEMA 4X (IP66) Cabinet Coolers** offer the same protection as NEMA 4 but are **constructed of stainless steel for food service and corrosive environments.**



Systems with thermostat control include a Cabinet Cooler, thermostat, solenoid valve, cold air distribution kit and filter.

## Selecting The Right Model ~~No~~ w Your System Options (continued)

### ETC™ Electronic Temperature Control

EXAIR's digital ETC (Electronic Temperature Control) provides precise temperature control for your electrical enclosure. It can accurately maintain a constant temperature that is slightly under the maximum rating of the electronics, permitting just enough cooling for the electronics without going so cold as to waste compressed air. The LED readout of the ETC displays the internal temperature of the

electrical enclosure (°F or °C) that is constantly being monitored by a quick response thermocouple. The control activates the solenoid valve (included) when the temperature setting is exceeded. The polycarbonate plastic enclosure of the ETC is suitable for NEMA 12, 4 and 4X environments. (Cabinet Cooler not included.)

| Model | Voltage          | Sample Rate | Max Temp     | Solenoid Valve | Setting Temp | Supply Current | Sensor              |
|-------|------------------|-------------|--------------|----------------|--------------|----------------|---------------------|
| 9238  | 120VAC, 50-60 Hz | 1/sec.      | 158°F (70°C) | ¼ NPT          | Push Button  | 250 mA max     | Type J Thermocouple |
| 9258  | 120VAC, 50/60 Hz | 1/sec.      | 158°F (70°C) | ½ NPT          | Push Button  | 325 mA max     | Type J Thermocouple |
| 9239  | 240VAC, 50/60 Hz | 1/sec.      | 158°F (70°C) | ¼ NPT          | Push Button  | 165 mA max     | Type J Thermocouple |
| 9259  | 240VAC, 50/60 Hz | 1/sec.      | 158°F (70°C) | ½ NPT          | Push Button  | 215 mA max     | Type J Thermocouple |

ETC controls are available within Cabinet Cooler Systems (see pages 226-228) or separately for retrofitting on existing coolers. All ETC enclosures are NEMA 4X (IP66), UL508 and UL94-5V. ETCs are RoHS and CE compliant.



ETC (Electronic Temperature Control) units are available in four different models. See above for details.

### Continuous Operation

Also available in any of our NEMA ratings, continuous operation Cabinet Cooler systems are recommended when constant cooling and constant positive purge are desirable.



Systems for continuous operation include a Cabinet Cooler, cold air distribution kit and filter.

### Special Cabinet Coolers

EXAIR manufactures special NEMA 12 (IP54), 4 (IP66) and 4X (IP66) Cabinet Coolers suited to specific environmental requirements:

**High Temperature Cabinet Coolers** (*shown top right*) for ambient temperatures of 125° to 200°F (52° to 93°C) are available. Internal components can withstand high temperatures (like those near furnaces, ovens, etc.).

**Non-Hazardous Purge Cabinet Cooler Systems** (*shown middle right*) are ideal for dirty areas where contaminants might normally pass through small holes or conduits. Under normal conditions, the NHP Cabinet Cooler Systems provide a slight positive pressure in the enclosure by passing 1 SCFM (28 SLPM) of air through the cooler, when the solenoid valve is in the closed position. When the thermostat detects high temperature, it energizes the solenoid valve to pass full line pressure and volume of compressed air to the Cabinet Cooler, giving it full cooling capability.

**Type 316 Stainless Steel NEMA 4X Cabinet Coolers** (*shown bottom right*) are suitable for food service, pharmaceutical, harsh and corrosive environments, and other applications where 316SS is preferred. Capacities from 275 to 5,600 Btu/hr. (80 to 1,641 Watts) are available.

EXAIR High Temperature Cabinet Coolers, Non-Hazardous Purge Cabinet Coolers and Type 316 Cabinet Coolers are now available from stock.





# Cabinet Cooler® Systems

**Filtration:** EXAIR Cabinet Cooler Systems include a 5 micron automatic drain water and dirt filter. This filter is critical for protection of electronics from water and dirt in the compressed air line. If oil is present in the compressed air, a coalescing (oil removal) filter, such as EXAIR Model 9005 is recommended. (See page 234)

**Inlet Air Temperature:** Cabinet Cooler Systems provide a 54°F (30°C) temperature drop from supply air temperature when the inlet pressure is 80 PSIG (5.5 BAR). Elevated inlet temperature will produce a corresponding rise in cold air temperature and reduction in cooling capacity. Low air pressures will also reduce the cooling capacity.

**Humidity:** For a continuous operating Cabinet Cooler System, relative humidity inside the enclosure stabilizes at 45%. No moisture condenses inside the enclosure. (The enclosure must be sealed to prevent condensation.)



## Cold Air Distribution Kit:

The kit includes a length of flexible vinyl tubing used to direct the cold air for circulation, or to hot spots. Tubing connectors and adhesive backed clips to hold the tubing in place are provided.



## Solenoid Valve and Thermostat:

Cabinet Cooler Systems with thermostat control include a solenoid valve and thermostat that limit the flow of compressed air to only cool when needed. The thermostat is factory set at 95°F (35°C). It will normally hold  $\pm 2^\circ\text{F}$  (1°C) inside the cabinet. Solenoid valves are available in 120V, 60Hz; 110V, 50Hz; 240V, 50/60Hz and 24VDC. All solenoids are CSA Certified and UL Listed or Recognized.



## Heat Can Stop Your Machines

When hot weather causes the electronics inside a control cabinet to fail, there is a panic to get the machinery up and running again. There are several cooling options out there and it's important to know the facts.

### A. Heat Exchangers and Heat Pipes

These have serious limitations. On hot summer days when the temperatures of the room and inside of the enclosure are about equal, there's not enough difference for effective heat exchange.

- They fail when dust and dirt clog the filter
- The cooling capacity is limited due to ambient conditions



### B. Refrigerant Panel Air Conditioners

These coolers are prone to failure in dirty, industrial environments when dust and dirt clog the filter.

- It takes almost a day to install
- Vibration from machinery causes refrigerant leaks and component failures



## EXAIR Cabinet Cooler® Systems

EXAIR has a complete line of Cabinet Cooler Systems to dependably cool and purge your electrical enclosures. They convert an ordinary supply of compressed air into clean, cold 20°F (-7°C) air. They mount in minutes through an ordinary electrical knockout and have no moving parts to wear out. The compressed air filtration that is provided keeps water, oil and other contaminants out of the enclosure.

- There is no room air filter to clog
- An accurate electrical thermostat control minimizes compressed air use
- All Cabinet Coolers are UL Listed, UL Classified and/or CE Compliant
- They are the only compressed air powered coolers that are CE compliant

## Sizing Guide - Let us do the work

On the following page, EXAIR provides a simple guide to fill in and send to us so we may do the heat load calculations for you and specify a Cabinet Cooler system. You may e-mail the information to [techhelp@exair.com](mailto:techhelp@exair.com), call 1-800-903-9247, fill out an online form at [exair.com/sizing](http://exair.com/sizing), use our new calculator at [https://exair.co/cccalc\\_ca](https://exair.co/cccalc_ca) or fax the information to 1-866-329-3924.

## How To Calculate Heat Load for Your Enclosure

If you would like to determine the correct model for your enclosure without our assistance, it is first necessary to determine the total heat load to which the control panel is subjected. This total heat load is the combination of two factors – heat dissipated within the enclosure and heat transfer from outside the enclosure.

### To Calculate Btu/hr. :

1. First, determine the approximate Watts of heat generated within the enclosure.  $\text{Watts} \times 3.41 = \text{Btu/hr.}$
2. Then, calculate outside heat transfer as follows:
  - a. Determine the area in square feet exposed to the air, ignoring the top of the cabinet.
  - b. Determine the temperature differential between maximum surrounding temperature and desired internal temperature. Then, using the Temperature Conversion Table (*below*), determine the Btu/hr./ft.<sup>2</sup> for that differential. Multiplying the cabinet surface area times Btu/hr./ft.<sup>2</sup> provides external heat transfer in Btu/hr.
3. Add internal and external heat loads for total heat load.

| Temperature Conversion Table |                          |
|------------------------------|--------------------------|
| Temperature Differential °F  | Btu/hr./ft. <sup>2</sup> |
| 5                            | 1.5                      |
| 10                           | 3.3                      |
| 15                           | 5.1                      |
| 20                           | 7.1                      |
| 25                           | 9.1                      |
| 30                           | 11.3                     |
| 35                           | 13.8                     |
| 40                           | 16.2                     |

After picking which NEMA integrity you need, choosing your options and calculating your heat load -go to page 226-228 to specify a model number.

See page 230 for HazLoc Cabinet Coolers.  
See page 232 for ATEX Cabinet Coolers.

**OR** Contact EXAIR and we'll walk you right through it.

### To Calculate Watts:

1. First, determine the approximate Watts of heat generated within the enclosure.
2. Then, calculate outside heat transfer as follows:
  - a. Determine the area in square meters exposed to the air, ignoring the top of the cabinet.
  - b. Determine the temperature differential between maximum surrounding temperature and desired internal temperature. Then, using the Metric Temperature Conversion Table (*below*), determine the Watts/m<sup>2</sup> for that differential. Multiplying the cabinet surface area times Watts/m<sup>2</sup> provides external heat transfer in Watts.
3. Add internal and external heat loads for total heat load.

| Temperature Conversion Table (METRIC) |                      |
|---------------------------------------|----------------------|
| Temperature Differential °C           | Watts/m <sup>2</sup> |
| 3                                     | 5.2                  |
| 6                                     | 11.3                 |
| 9                                     | 17.6                 |
| 12                                    | 24.4                 |
| 15                                    | 31.4                 |
| 18                                    | 39.5                 |
| 21                                    | 47.7                 |

#### Example:

**Internal heat dissipation: 471 Watts or 1,606 Btu/hr.**

**Cabinet area: 40 ft.<sup>2</sup>**

**Maximum outside temperature: 110°F**

**Desired internal temperature: 95°F**

The conversion table (above) shows that a 15°F temperature differential inputs 5.1 Btu/hr./ft.<sup>2</sup>

$40 \text{ ft.}^2 \times 5.1 \text{ Btu/hr./ft.}^2 = 204 \text{ Btu/hr.}$  external heat load.

Therefore, 204 Btu/hr. external heat load plus 1,606 Btu/hr. internal heat load = 1,810 Btu/hr. total heat load or Btu/hr. refrigeration required to maintain desired temperature.

In this example, the correct choice is a 2,000 Btu/hr. Cabinet Cooler System. Choose a Cabinet Cooler model by determining the NEMA rating of the enclosure (type of environment), and with or without thermostat control.

#### Example:

**Internal heat dissipation: 471 Watts**

**Cabinet area: 3.7m<sup>2</sup>**

**Maximum outside temperature: 44°C**

**Desired internal temperature: 35°C**

The conversion table (above) shows that a 9°C temperature differential inputs 17.6 Watts/m<sup>2</sup>.

$3.7 \text{ m}^2 \times 17.6 \text{ Watts/m}^2 = 65.1 \text{ Watts}$  external heat load.

Therefore, 65.1 Watts external heat load plus 471 Watts internal heat load = 536.1 Watts total heat load or Watts of refrigeration required to maintain desired temperature.

In this example, the correct choice is a 586 Watt Cabinet Cooler System. Choose a Cabinet Cooler model by determining the NEMA rating of the enclosure (type of environment), and with or without thermostat control.



# EXAIR® Cabinet Cooler® System Sizing Guide

## Deliver your Data – Receive a Quote

Use this form to gather the information necessary to specify a Cabinet Cooler System and choose a delivery method below.



Submit online  
[www.exair.com/sizing.htm](http://www.exair.com/sizing.htm)



Call us at  
1-800-903-9247



TO QUICK  
MOBILE  
VERSION

<https://exair.co/qr-pro-ccsg>



Online chat with us at  
[www.exair.com](http://www.exair.com)



Calculate Yourself  
<https://exair.co/04-CCcalc>


Send Us The Facts!

## Cabinet Cooler Sizing Guide

To: Application Engineering Department, **EXAIR®**  
From: **Name** \_\_\_\_\_  
**Company** \_\_\_\_\_  
**FAX number** \_\_\_\_\_  
**Phone number** \_\_\_\_\_ **Ext.#** \_\_\_\_\_  
**E-mail** \_\_\_\_\_

In a hurry? For help NOW, call  
our Application Engineering  
Department at 1-800-903-9247

**You can fill this  
form out online at:**  
[www.exair.com/sizing.htm](http://www.exair.com/sizing.htm)

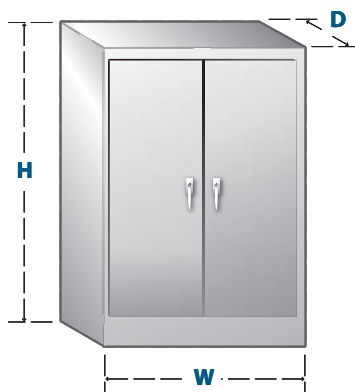

1. Height (H) \_\_\_\_\_ 2. Width (W) \_\_\_\_\_ 3. Depth (D) \_\_\_\_\_

4. \* External air temperature now? \_\_\_\_\_ °F or °C

5. \* Internal air temperature now? \_\_\_\_\_ °F or °C

6. Maximum external air temperature possible? \_\_\_\_\_ °F or °C

7. Maximum internal air temperature desired? \_\_\_\_\_ °F or °C

8. My cabinet rating is: ☐ NEMA 12 ☐ NEMA 4 ☐ NEMA 4X

☐ Other (explain) \_\_\_\_\_

9. My cabinet is in an area with a hazardous classification: ☐ YES ☐ NO

10. My cabinet is in an explosive environment: ☐ YES ☐ NO

11. My cabinet is (check all that apply): ☐ Vented - outside air circulates through the enclosure  
☐ Not Vented - outside air does not circulate through the enclosure  
☐ Wall mounted  
☐ Fan(s)/Vent(s) - Indicate diameter or SCFM \_\_\_\_\_  
Number of fans/vents \_\_\_\_\_

12. Available voltage for thermostat control: ☐ 24 VDC ☐ 110 VAC ☐ 240 VAC



\*Using a "Temperature Gun" or infrared thermometer will result in measuring surface temperatures.

Air temperatures are needed for the cabinet cooling calculations. Please use a standard thermometer or thermocouple to measure the air temperature.


## Cabinet Coolers Keep Working at Full Capacity After Seven Years of Near Constant Operation

**The Problem:** A manufacturer of automotive radiators had a problem relating to an overheated motor drive which caused one of their two production lines to come to a stop. They used a refrigerant based air conditioner set on the panel, but the air conditioner began leaking water into the panel. The water got into the motor drive, shorted it out and caused the production line to go down. Not only was production down for 1 month, but the motor drive cost them \$20,000 to replace by the time they purchased, had it shipped and got it installed.



**The Solution:** The manufacturer was unsure of what they were going to use for an air conditioning unit because the motor drives had to stay cool. They purchased EXAIR's Model 4330 NEMA 12 2,000 Btu/hr. (586 Watts) Cabinet Cooler System with thermostat control for the panel. The Cabinet Cooler System worked perfectly at solving the cooling problem.

Seven years later, this manufacturer contacted EXAIR for another application. They mentioned the old EXAIR Cabinet Cooler system still on the motor drive panel, cranking out cold air. No maintenance had been performed on the Cabinet Cooler System in that time (as none was necessary) even though the environment was quite dirty. It was still working perfectly!



**Comment:** When we talk to customers about the EXAIR Cabinet Cooler Systems, one of their initial concerns is how long they last. With a source of clean/dry compressed air, the life span of a Cabinet Cooler can easily be in the range of 20 years or more, since there are no moving parts to wear out. In that time frame, you could have to purchase four refrigerant based units, pay to have them changed out and pay for them to be maintained 2 - 4 times per year, changing filters, replacing compressors, and re-charging refrigerant. Not only does the Cabinet Cooler last a long time, but when it is operating, it produces a positive pressure inside the panel which keeps dust and debris from getting inside your cabinet over time.

## Cooling in a Hostile Environment



**The Problem:** A traditional refrigerant based air conditioner was installed on wastewater clarifier controls but could not withstand the harsh chemical environment of the wastewater industry. Controls on a wastewater clarifier process were mounted outdoors and experienced weather related overheating problems in the hotter months of the year. Not only did higher temperatures compromise the performance of the traditional refrigerant based air conditioner, the corrosive environment from the many different wastewater chemicals, acids and bases prematurely wore the critical moving parts of the air conditioner.

**The Solution:** A Model 4850SS-316 Cabinet Cooler System provided 3,400 Btu/hr. (997 Watts) of cooling for the clarifier controls and kept them running efficiently. The Cabinet Cooler is resistant to seasonal temperature fluctuations because it operates from a source of compressed air and not ambient air. The 316SS construction also provided high corrosion resistance to the chemical environment. Since EXAIR Cabinet Coolers have no moving parts, another maintenance concern was eliminated.

**Comment:** The inherent reliability of the vortex tube operated Cabinet Cooler System is another important advantage in this application. Because they have no moving parts, EXAIR Cabinet Coolers are virtually impervious to hostile environments. Wastewater treatment, chemical processing, paper manufacturing, steel mills and power generation are just a few of the facilities benefitting from this simple, yet effective technology.



# Cabinet Cooler® Systems

## NEMA 12 (IP54) Cabinet Cooler Systems

|                                               | 120V<br>Thermostat Control<br>Model # | ETC 120V Thermostat<br>Control Model # | ETC 240V Thermostat<br>Control Model # | High Temp Thermostat<br>Control Model # | Non-Hazardous Purge<br>Thermostat Control<br>Model # | Capacity* |       | Sound<br>level dBA |
|-----------------------------------------------|---------------------------------------|----------------------------------------|----------------------------------------|-----------------------------------------|------------------------------------------------------|-----------|-------|--------------------|
|                                               |                                       |                                        |                                        |                                         |                                                      | Btu/Hr    | Watts |                    |
| NEMA 12<br>(IP54)<br>(Dust, Oil<br>Resistant) | 4304                                  | 4304-ETC120                            | 4304-ETC240                            | N/A                                     | NHP4304                                              | 275       | 80    | 59**               |
|                                               | 4308                                  | 4308-ETC120                            | 4308-ETC240                            | N/A                                     | NHP4308                                              | 550       | 162   | 67**               |
|                                               | 4315                                  | 4315-ETC120                            | 4315-ETC240                            | HT4315                                  | NHP4315                                              | 1,000     | 293   | 73**               |
|                                               | 4325                                  | 4325-ETC120                            | 4325-ETC240                            | HT4325                                  | NHP4325                                              | 1,700     | 498   | 74**               |
|                                               | 4330                                  | 4330-ETC120                            | 4330-ETC240                            | HT4330                                  | NHP4330                                              | 2,000     | 586   | 74**               |
|                                               | 4340                                  | 4340-ETC120                            | 4340-ETC240                            | HT4340                                  | NHP4340                                              | 2,800     | 821   | 78**               |
|                                               | 4350                                  | 4350-ETC120                            | 4350-ETC240                            | HT4350                                  | NHP4350                                              | 3,400     | 997   | 75**               |
|                                               | 4360                                  | 4360-ETC120                            | 4360-ETC240                            | HT4360                                  | NHP4360                                              | 4,000     | 1,171 | 77**               |
|                                               | 4370                                  | 4370-ETC120                            | 4370-ETC240                            | HT4370                                  | NHP4370                                              | 4,800     | 1,406 | 77**               |
|                                               | 4380                                  | 4380-ETC120                            | 4380-ETC240                            | HT4380                                  | NHP4380                                              | 5,600     | 1,641 | 79**               |

|                                               | Cabinet Cooler Only<br>Model # | Continuous Operation<br>Model # | High Temp<br>Continuous Operation<br>Model # | Capacity* |       | Sound<br>level dBA |
|-----------------------------------------------|--------------------------------|---------------------------------|----------------------------------------------|-----------|-------|--------------------|
|                                               |                                |                                 |                                              | Btu/Hr    | Watts |                    |
| NEMA 12<br>(IP54)<br>(Dust, Oil<br>Resistant) | 4004                           | 4204                            | N/A                                          | 275       | 80    | 59**               |
|                                               | 4008                           | 4208                            | N/A                                          | 550       | 162   | 67**               |
|                                               | 4015                           | 4215                            | HT4215                                       | 1,000     | 293   | 73**               |
|                                               | 4025                           | 4225                            | HT4225                                       | 1,700     | 498   | 74**               |
|                                               | 4030                           | 4230                            | HT4230                                       | 2,000     | 586   | 74**               |
|                                               | 4040                           | 4240                            | HT4240                                       | 2,800     | 821   | 78**               |
|                                               | N/A                            | 4250                            | HT4250                                       | 3,400     | 997   | 75**               |
|                                               | N/A                            | 4260                            | HT4260                                       | 4,000     | 1,171 | 77**               |
|                                               | N/A                            | 4270                            | HT4270                                       | 4,800     | 1,406 | 77**               |
|                                               | N/A                            | 4280                            | HT4280                                       | 5,600     | 1,641 | 79**               |

\*Cooling capacity at 100 PSIG (6.9 BAR) supply pressure. \*\*With optional cold muffler installed.

**NEMA 12 (IP54)** Cabinet Cooler systems are dust and oil tight. They are ideal for general industrial environments where no liquids or corrosives are present.

**Thermostat control** systems (Models 4304-4380) are the most efficient cabinet cooler system because it will turn itself on and off as needed to cool your enclosure. Includes cooler, solenoid valve, thermostat, filter separator and cold air distribution kit. Models are available in 120VAC, 240VAC and 24VDC.

**Continuous operation** systems (Models 4204-4280) include the cooler, a filter separator and cold air distribution kit.

**ETC Thermostat control** systems provide on the fly temperature adjustment and display internal temperature in real time.


**High Temperature** Cabinet Cooler systems should be used when ambient temperatures reach 125°F to 200°F (52°C to 93°C).

**Non-Hazardous Purge (NHP)** models provide a continuous positive purge within the enclosure to prevent contaminants from entering. They are suited for extremely dirty and dusty environments.

**Dual** Cabinet Cooler systems (Models ##50-##80) provide for additional cooling.


### Dimensions

| Model #'s<br>NEMA 12<br>(IP54) |
|--------------------------------|
| 4004                           |
| 4008                           |
| 4204                           |
| 4208                           |
| 4304                           |
| 4308                           |

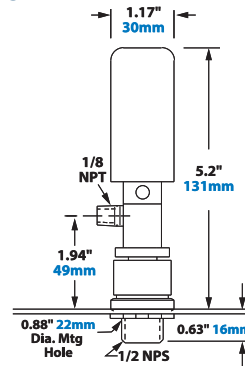

### Dimensions

| Model #'s<br>NEMA 12<br>(IP54) |
|--------------------------------|
| 4015                           |
| 4025                           |
| 4030                           |
| 4040                           |
| 4215                           |
| 4225                           |
| 4230                           |
| 4240                           |
| 4315                           |
| 4325                           |
| 4330                           |
| 4340                           |

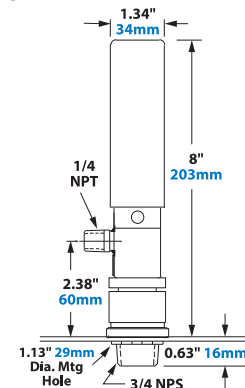

## NEMA 4 (IP66) Cabinet Cooler Systems

|                                           | 120V<br>Thermostat Control<br>Model# | ETC 120V Thermostat<br>Control Model# | ETC 240V Thermostat<br>Control Model# | High Temp Thermostat<br>Control Model# | Non Hazardous Purge<br>Thermostat Control<br>Model# | Capacity*<br>Btu/Hr | Watts | Sound<br>level<br>dBA |
|-------------------------------------------|--------------------------------------|---------------------------------------|---------------------------------------|----------------------------------------|-----------------------------------------------------|---------------------|-------|-----------------------|
| NEMA 4<br>(IP66)<br>(Splash<br>Resistant) | 4804                                 | 4804-ETC120                           | 4804-ETC240                           | N/A                                    | NHP4804                                             | 275                 | 80    | 59**                  |
|                                           | 4808                                 | 4808-ETC120                           | 4808-ETC240                           | N/A                                    | NHP4808                                             | 550                 | 162   | 67**                  |
|                                           | 4815                                 | 4815-ETC120                           | 4815-ETC240                           | HT4815                                 | NHP4815                                             | 1,000               | 293   | 73                    |
|                                           | 4825                                 | 4825-ETC120                           | 4825-ETC240                           | HT4825                                 | NHP4825                                             | 1,700               | 498   | 80                    |
|                                           | 4830                                 | 4830-ETC120                           | 4830-ETC240                           | HT4830                                 | NHP4830                                             | 2,000               | 586   | 80                    |
|                                           | 4840                                 | 4840-ETC120                           | 4840-ETC240                           | HT4840                                 | NHP4840                                             | 2,800               | 821   | 82                    |
|                                           | 4850                                 | 4850-ETC120                           | 4850-ETC240                           | HT4850                                 | NHP4850                                             | 3,400               | 997   | 84                    |
|                                           | 4860                                 | 4860-ETC120                           | 4860-ETC240                           | HT4860                                 | NHP4860                                             | 4,000               | 1,171 | 84                    |
|                                           | 4870                                 | 4870-ETC120                           | 4870-ETC240                           | HT4870                                 | NHP4870                                             | 4,800               | 1,406 | 84                    |
|                                           | 4880                                 | 4880-ETC120                           | 4880-ETC240                           | HT4880                                 | NHP4880                                             | 5,600               | 1,641 | 85                    |

|                                           | Cabinet Cooler Only<br>Model# | Continuous Operation<br>Model# | High Temp<br>Continuous Operation Model# | Capacity*<br>Btu/Hr | Watts | Sound<br>level dBA |
|-------------------------------------------|-------------------------------|--------------------------------|------------------------------------------|---------------------|-------|--------------------|
| NEMA 4<br>(IP66)<br>(Splash<br>Resistant) | 4604                          | 4704                           | N/A                                      | 275                 | 80    | 59**               |
|                                           | 4608                          | 4708                           | N/A                                      | 550                 | 162   | 67**               |
|                                           | 4615                          | 4715                           | HT4715                                   | 1,000               | 293   | 73                 |
|                                           | 4625                          | 4725                           | HT4725                                   | 1,700               | 498   | 80                 |
|                                           | 4630                          | 4730                           | HT4730                                   | 2,000               | 586   | 80                 |
|                                           | 4640                          | 4740                           | HT4740                                   | 2,800               | 821   | 82                 |
|                                           | N/A                           | 4750                           | HT4750                                   | 3,400               | 997   | 84                 |
|                                           | N/A                           | 4760                           | HT4760                                   | 4,000               | 1,171 | 84                 |
|                                           | N/A                           | 4770                           | HT4770                                   | 4,800               | 1,406 | 84                 |
|                                           | N/A                           | 4780                           | HT4780                                   | 5,600               | 1,641 | 85                 |

\*Cooling capacity at 100 PSIG (6.9 BAR) supply pressure. \*\*With optional cold muffler installed.

**NEMA 4 (IP66)** Cabinet Cooler systems are dust and oil tight, splash resistant and indoor/outdoor capable. By incorporating a low pressure valve for all air exhaust, the valve closes and seals when not operating to maintain NEMA 4 enclosure integrity.

**Thermostat control** systems (Models 4804-4880) are the most efficient system because it will turn itself on and off as needed to cool your enclosure. Includes cooler, solenoid valve and thermostat, filter separator and cold air distribution kit. Models are available in 120VAC, 240VAC and 24VDC.

**Continuous operation** systems (Models 4704-4780) include the cooler, a filter separator and cold air distribution kit.

**ETC Thermostat control** systems provide on the fly temperature adjustment and display internal temperature in real time.


**High Temperature** Cabinet Cooler systems should be used when ambient temperatures reach 125°F to 200°F (52°C to 93°C).

**Non-Hazardous Purge (NHP)** models provide a continuous positive purge within the enclosure to prevent contaminants from entering. They are suited for extremely dirty and dusty environments.

**Dual** Cabinet Cooler systems (Models ##50-##80) provide for additional cooling.


### Dimensions

| Model #s<br>NEMA 4<br>(IP66) |
|------------------------------|
| 4604                         |
| 4608                         |
| 4704                         |
| 4708                         |
| 4804                         |
| 4808                         |



### Dimensions

| Model #s<br>NEMA 4<br>(IP66) |
|------------------------------|
| 4615                         |
| 4625                         |
| 4630                         |
| 4640                         |
| 4715                         |
| 4725                         |
| 4730                         |
| 4740                         |
| 4815                         |
| 4825                         |
| 4830                         |
| 4840                         |

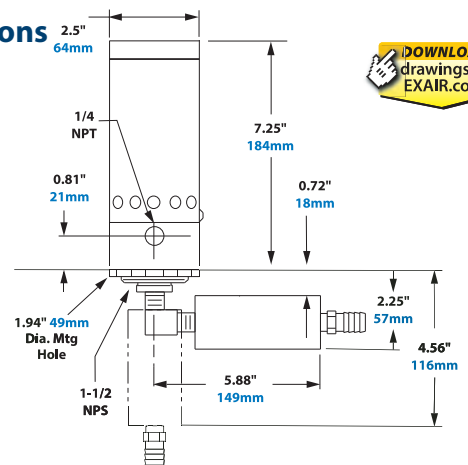



# Cabinet Cooler® Systems

## NEMA 4X ( P66) Cabinet Cooler Systems

|                                                | 120V<br>Thermostat Control<br>Model# | ETC 120V Thermostat<br>Control Model# | ETC 240V Thermostat<br>Control Model# | High Temp Thermostat<br>Control Model# | Non-Hazardous Purge<br>Thermostat Control<br>Model# | Capacity*<br>Btu/Hr | Watts | Sound<br>level<br>dBA |
|------------------------------------------------|--------------------------------------|---------------------------------------|---------------------------------------|----------------------------------------|-----------------------------------------------------|---------------------|-------|-----------------------|
| NEMA 4X<br>(IP66)<br>(CorrosionRe-<br>sistant) | 4804SS                               | 4804SS-ETC120                         | 4804SS-ETC240                         | N/A                                    | NHP4804SS                                           | 275                 | 80    | 59**                  |
|                                                | 4808SS                               | 4808SS-ETC120                         | 4808SS-ETC240                         | N/A                                    | NHP4808SS                                           | 550                 | 162   | 67**                  |
|                                                | 4815SS                               | 4815SS-ETC120                         | 4815SS-ETC240                         | HT4815SS                               | NHP4815SS                                           | 1,000               | 293   | 73                    |
|                                                | 4825SS                               | 4825SS-ETC120                         | 4825SS-ETC240                         | HT4825SS                               | NHP4825SS                                           | 1,700               | 498   | 80                    |
|                                                | 4830SS                               | 4830SS-ETC120                         | 4830SS-ETC240                         | HT4830SS                               | NHP4830SS                                           | 2,000               | 586   | 80                    |
|                                                | 4840SS                               | 4840SS-ETC120                         | 4840SS-ETC240                         | HT4840SS                               | NHP4840SS                                           | 2,800               | 821   | 82                    |
|                                                | 4850SS                               | 4850SS-ETC120                         | 4850SS-ETC240                         | HT4850SS                               | NHP4850SS                                           | 3,400               | 997   | 84                    |
|                                                | 4860SS                               | 4860SS-ETC120                         | 4860SS-ETC240                         | HT4860SS                               | NHP4860SS                                           | 4,000               | 1,171 | 84                    |
|                                                | 4870SS                               | 4870SS-ETC120                         | 4870SS-ETC240                         | HT4870SS                               | NHP4870SS                                           | 4,800               | 1,406 | 84                    |
|                                                | 4880SS                               | 4880SS-ETC120                         | 4880SS-ETC240                         | HT4880SS                               | NHP4880SS                                           | 5,600               | 1,641 | 85                    |

|                                               | Cabinet Cooler Only<br>Model# | Continuous Operation<br>Model# | High Temp<br>Continuous Operation Model# | Capacity*<br>Btu/Hr | Watts | Sound<br>level<br>dBA |
|-----------------------------------------------|-------------------------------|--------------------------------|------------------------------------------|---------------------|-------|-----------------------|
| NEMA 4X<br>(IP66)<br>(Corrosion<br>Resistant) | 4604SS                        | 4704SS                         | N/A                                      | 275                 | 80    | 59**                  |
|                                               | 4608SS                        | 4708SS                         | N/A                                      | 550                 | 162   | 67**                  |
|                                               | 4615SS                        | 4715SS                         | HT4715SS                                 | 1,000               | 293   | 73                    |
|                                               | 4625SS                        | 4725SS                         | HT4725SS                                 | 1,700               | 498   | 80                    |
|                                               | 4630SS                        | 4730SS                         | HT4730SS                                 | 2,000               | 586   | 80                    |
|                                               | 4640SS                        | 4740SS                         | HT4740SS                                 | 2,800               | 821   | 82                    |
|                                               | N/A                           | 4750SS                         | HT4750SS                                 | 3,400               | 997   | 84                    |
|                                               | N/A                           | 4760SS                         | HT4760SS                                 | 4,000               | 1,171 | 84                    |
|                                               | N/A                           | 4770SS                         | HT4770SS                                 | 4,800               | 1,406 | 84                    |
|                                               | N/A                           | 4780SS                         | HT4780SS                                 | 5,600               | 1,641 | 85                    |

\*Cooling capacity at 100 PSIG (6.9 BAR) supply pressure. \*\*With optional cold muffler installed.

**NEMA 4X (IP66)** Cabinet Cooler systems are made from 303 stainless steel, dust and oil tight, splash resistant, indoor/outdoor capable and corrosion resistant. By incorporating a low pressure valve for all air exhaust, the valve closes and seals when not operating to maintain NEMA 4X enclosure integrity.

**Thermostat control** systems (Models 4804SS-4880SS) are the most efficient system because it will turn itself on and off as needed to cool your enclosure. Includes cooler, solenoid valve and thermostat, filter separator and cold air distribution kit. Models are available in 120VAC, 240VAC and 24VDC.

**Continuous operation** systems (Models 4704SS-4780SS) include the cooler, a filter separator and cold air distribution kit.

**ETC Thermostat control** systems provide on the fly temperature adjustment and display internal temperature in real time.


**High Temperature** Cabinet Cooler systems should be used when ambient temperatures reach 125°F to 200°F (52°C to 93°C).

**Non-Hazardous Purge (NHP)** models provide a continuous positive purge within the enclosure to prevent contaminants from entering. They are suited for extremely dirty and dusty environments.

**Dual** Cabinet Cooler systems (Models ##50SS-##80SS) provide for additional cooling.

### Dimensions

| Model #'s<br>NEMA 4X<br>(IP66) |
|--------------------------------|
| 4604SS                         |
| 4608SS                         |
| 4704SS                         |
| 4708SS                         |
| 4804SS                         |
| 4808SS                         |




DOWNLOAD  
drawings at  
EXAIR.com

**NEMA 4X**  
AVAILABLE  
IN 316SS

### Dimensions

| Model #'s<br>NEMA 4X<br>(IP66) |
|--------------------------------|
| 4615SS                         |
| 4625SS                         |
| 4630SS                         |
| 4640SS                         |
| 4715SS                         |
| 4725SS                         |
| 4730SS                         |
| 4740SS                         |
| 4815SS                         |
| 4825SS                         |
| 4830SS                         |
| 4840SS                         |

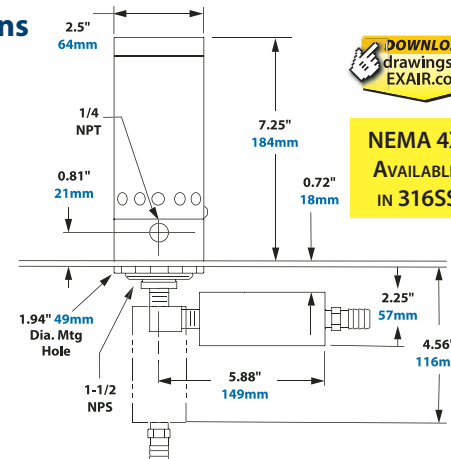

DOWNLOAD  
drawings at  
EXAIR.com

**NEMA 4X**  
AVAILABLE  
IN 316SS

| Accessories and Components |                                                                                                                 |         |                                                                                  |
|----------------------------|-----------------------------------------------------------------------------------------------------------------|---------|----------------------------------------------------------------------------------|
| Model #                    | Description                                                                                                     | Model # | Description                                                                      |
| 4902                       | Cold Muffler only                                                                                               | 9044    | Valve and Thermostat Kit, 240V, 50/60 Hz                                         |
| 4904                       | Cold Air Distribution Kit<br>(For all Cabinet Coolers 650 Btu/hr. and higher)                                   | 9016    | NEMA 4-4X Valve and Thermostat Kit, 120V, 50/60 Hz                               |
| 4905                       | Cold Air Distribution Kit<br>(For Cabinet Coolers up to 550 Btu/hr.)                                            | 9045    | NEMA 4-4X Valve and Thermostat Kit, 240V, 50/60 Hz                               |
| 9004                       | Automatic Drain Filter Separator, 1/4 NPT, 43 SCFM (1,359 SLPM)                                                 | 9017    | Thermostat Only, 24V-240V, 50/60Hz                                               |
| 9027                       | Oil Removal Filter (For Cabinet Coolers with 550 Btu/hr. output),<br>1/4 NPT, 7-24 SCFM (198-680 SLPM)          | 9018    | NEMA 4-4X Solenoid Valve Only, 120V, 50/60 Hz, 1/4 NPT,<br>40 SCFM (1,133 SLPM)  |
| 9005                       | Oil Removal Filter (For all Cabinet Coolers except 550 Btu/hr. output),<br>3/8 NPT, 15-37 SCFM (425-1,048 SLPM) | 9024    | NEMA 4-4X Solenoid Valve Only, 240V, 50/60 Hz, 1/4 NPT, 40 SCFM (1,133<br>SLPM)  |
| 9006                       | Oil Removal Filter, 3/4 NPT, 50-150 SCFM (1,416-4,248 SLPM)                                                     | 9020    | Solenoid Valve Only, 120V, 50/60 Hz, 1/4 NPT, 40 SCFM (1,133 SLPM)               |
| 9008                       | Pressure Regulator with Gauge, 1/4 NPT, 50 SCFM (1,416 SLPM)                                                    | 9021    | Solenoid Valve Only, 200-240V, 50/60 Hz, 1/4 NPT, 40 SCFM (1,133 SLPM)           |
| 9238                       | ETC - Electronic Temperature Control, 120V, 50/60 Hz, 1/4 NPT                                                   | 9031    | NEMA 4-4X Solenoid Valve Only, 24VDC, 1/4 NPT, 40 SCFM (1,133 SLPM)              |
| 9239                       | ETC - Electronic Temperature Control, 240V, 50/60 Hz, 1/4 NPT                                                   | 9034    | NEMA 4-4X Solenoid Valve Only, 120V, 50/60 Hz, 1/2 NPT, 100 SCFM (2,832<br>SLPM) |
| 9258                       | ETC - Electronic Temperature Control, 120V, 50/60 Hz, 1/2 NPT                                                   | 9058    | NEMA 4-4X Solenoid Valve Only, 24VDC, 1/2 NPT, 100 SCFM<br>(2,832 SLPM)          |
| 9259                       | ETC - Electronic Temperature Control, 240V, 50/60 Hz, 1/2 NPT                                                   |         |                                                                                  |
| 9015                       | Valve and Thermostat Kit, 120V, 50/60 Hz                                                                        |         |                                                                                  |

**EXAIR's Side Mount Kits for NEMA 12, 4 and 4X Cabinet Coolers offer convenient mounting to the side of an electrical enclosure.**



## Side Mount Kits


EXAIR's Side Mount Kits make mounting on the side of an electrical enclosure possible when there is limited space on the top or side. (NEMA 4 and 4X Cabinet Cooler Systems must be mounted vertically.) The Side Mount Kits maintain the NEMA rating of large and small NEMA Type 12, 4 and 4X enclosures. They mount in a standard electrical knockout (1-1/2 NPS). Side Mount Kits for NEMA 12 Cabinet Cooler Systems have an aluminum construction. Those for NEMA 4 and 4X Cabinet Cooler Systems are Type 303 or Type 316 stainless steel.

| Accessories and Components |                                                                                                               |
|----------------------------|---------------------------------------------------------------------------------------------------------------|
| Model #                    | Description                                                                                                   |
| 4909                       | Side Mount Kit for NEMA 12 Cabinet Coolers up to 550 Btu/hr. (162 Watts)                                      |
| 4910                       | Side Mount Kit for NEMA 12 Cabinet Coolers, 650 Btu/hr. (192 Watts) and higher                                |
| 4906                       | Side Mount Kit for NEMA 4 and 4X Cabinet Coolers up to 550 Btu/hr. (162 Watts)                                |
| 4907                       | Side Mount Kit for NEMA 4 and 4X Cabinet Coolers, 650 Btu/hr. (192 Watts) and higher                          |
| 4906-316                   | Type 316 Stainless Steel Side Mount Kit for NEMA 4 and 4X Cabinet Coolers, up to 550 Btu/hr. (162 Watts)      |
| 4907-316                   | Type 316 Stainless Steel Side Mount Kit for NEMA 4 and 4X Cabinet Coolers, 650 Btu/hr. (192 Watts) and higher |



| 90 Degree Side Mount Kit Dimensions |    |      |      |      |      |      |           |
|-------------------------------------|----|------|------|------|------|------|-----------|
| Model                               |    | A    | B    | C    | D    | E    | F         |
| 4906                                | in | 2.50 | 2.50 | 1.50 | 3.50 | 3.03 | 1 NPS     |
|                                     | mm | 64   | 64   | 38   | 89   | 77   |           |
| 4907                                | in | 2.50 | 2.50 | 1.50 | 3.50 | 3.03 | 1-1/2 NPS |
|                                     | mm | 64   | 64   | 38   | 89   | 77   |           |
| 4909                                | in | 2.50 | 2.50 | 1.50 | 2.19 | 1.73 | 1-1/2 NPS |
|                                     | mm | 64   | 64   | 38   | 56   | 44   |           |
| 4910                                | in | 2.50 | 2.50 | 1.50 | 2.19 | 1.73 | 3/4 NPS   |
|                                     | mm | 64   | 64   | 38   | 56   | 44   |           |

## Side Mount Kit Dimensions

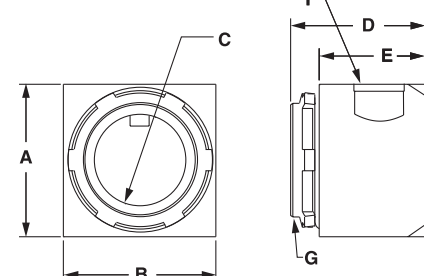

# Hazardous Location Cabinet Cooler® Systems



**For use with classified  
enclosure purge and  
pressurization systems**

- Class I Div 1, Groups A, B, C and D
- Class II Div 1, Groups E, F and G
- Class III

**HazLoc Cabinet Coolers  
maintain NEMA 4/4X  
integrity and are  
CE compliant!**



## What is an EXAIR HazLoc Cabinet Cooler System?

These Cabinet Cooler Systems are engineered and approved for use upon purged electrical enclosures (not included) found within classified areas. The areas approved are Class I Div 1, Groups A, B, C and D – Class II Div 1 Groups E, F and G - and Class III. EXAIR's HazLoc Cabinet Cooler Systems have been tested by UL and meet the stringent UL requirements for these areas. Cabinet Cooler systems are a low cost and reliable way to cool purged electric control panels found within these environments. They utilize vortex tube technology to produce up to 5,600 Btu/Hr, with no moving parts, which additionally creates a low maintenance solution for cooling your HazLoc purged cabinets.

### Advantages

- Rated for Div I Hazardous Locations
- UL Classified
- Available in 8 different cooling capacities
- No moving parts, low maintenance
- Thermostat control reduces operating cost
- Large range of cooling capacities up to 5,600 Btu/Hr
- 5 Year warranty
- Low cost

## Why EXAIR HazLoc Cabinet Cooler Systems?

EXAIR's HazLoc Cabinet Cooler Systems have been set apart from the competition by achieving the UL classified designation for Div I environments. Thermostatically controlled systems are recommended for the highest efficiency and include UL listed solenoids, also for hazardous environments. EXAIR Cabinet Cooler systems will install on your purged enclosure in minutes, require little to no maintenance and operate under the toughest of industrial conditions. If you require low cost, ease of use and/or reliability – a HazLoc Cabinet Cooler system will meet your needs.

EXAIR Hazardous Location Cabinet Cooler Systems are available in 8 different cooling capacities from 1,000 Btu/Hr. to 5,600 Btu/Hr. This range of cooling allows for choosing the best fit for your cooling needs without wasting compressed air.

Cabinet Cooler Systems protect your electronics from heat, dirt and moisture and keep your processes running. They are the low-cost solution to messy, high maintenance coolant-based air conditioners with simple installation. With modern technology comes an increased number of small electronic components packed into smaller electronic cabinets. This creates a high internal heat load which increases failures due to heat. Components will fail, sensors will misread, controls can drift and displays become inaccurate. EXAIR HazLoc Cabinet Coolers can solve these problems and prevent lost productivity, shutdown and the expense of new components.



## Thermostat Control

Each EXAIR HazLoc Cabinet Cooler System is available with a thermostat control or as a continuous operation system. Each of these systems will include a water-dirt filter separator to prevent water condensate and dirt from entering your enclosure and a cold air distribution kit used to direct the air for circulation or onto hot spots.


HazLoc Cabinet Cooler Systems are also available in Type 316SS for highly corrosive environments.

Any control systems and accessories not rated for the hazardous location need to be moved outside of the hazardous area or inside a properly purged and pressurized enclosure which is suitable for the hazardous area.

## Safety

EXAIR's HazLoc Cabinet Cooler Systems are not purged and pressurized control systems and should not be relied upon nor used in place of a purged and pressurized controller. They are meant for use in conjunction with a purged and pressurized control system.

| Model #'s<br>NEMA 4 | Model #'s<br>NEMA 4X |
|---------------------|----------------------|
| HZ4615              | HZ4615SS             |
| HZ4625              | HZ4625SS             |
| HZ4630              | HZ4630SS             |
| HZ4640              | HZ4640SS             |
| HZ4715              | HZ4715SS             |
| HZ4725              | HZ4725SS             |
| HZ4730              | HZ4730SS             |
| HZ4740              | HZ4740SS             |
| HZ4815              | HZ4815SS             |
| HZ4825              | HZ4825SS             |
| HZ4830              | HZ4830SS             |
| HZ4840              | HZ4840SS             |

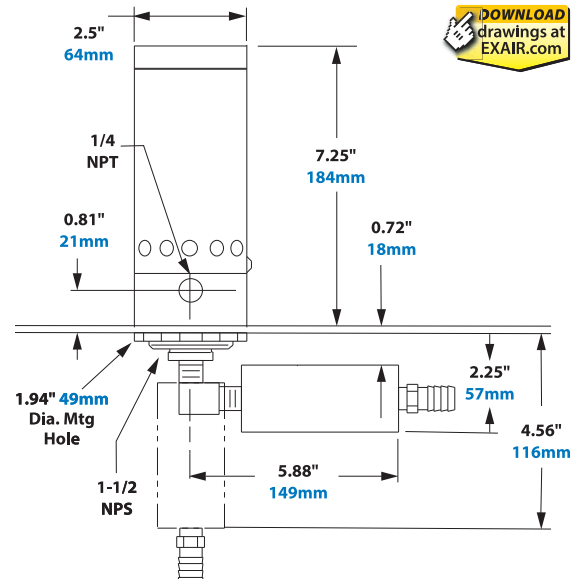

## NEMA 4 (IP66) Hazardous Location Cabinet Cooler Systems

| Cabinet Cooler Only Model # | Continuous Operation Model # | 120V Thermostat Control Model # | 240V Thermostat Control Model # | 24VDC Thermostat Control Model # | Capacity* Btu/Hr | Watts | Sound level dBA |
|-----------------------------|------------------------------|---------------------------------|---------------------------------|----------------------------------|------------------|-------|-----------------|
| HZ4615                      | HZ4715                       | HZ4815                          | HZ4815-240                      | HZ4815-24VDC                     | 1,000            | 293   | 73              |
| HZ4625                      | HZ4725                       | HZ4825                          | HZ4825-240                      | HZ4825-24VDC                     | 1,700            | 498   | 80              |
| HZ4630                      | HZ4730                       | HZ4830                          | HZ4830-240                      | HZ4830-24VDC                     | 2,000            | 586   | 80              |
| HZ4640                      | HZ4740                       | HZ4840                          | HZ4840-240                      | HZ4840-24VDC                     | 2,800            | 821   | 82              |
| N/A                         | HZ4750                       | HZ4850                          | HZ4850-240                      | HZ4850-24VDC                     | 3,400            | 997   | 84              |
| N/A                         | HZ4760                       | HZ4860                          | HZ4860-240                      | HZ4860-24VDC                     | 4,000            | 1,171 | 84              |
| N/A                         | HZ4770                       | HZ4870                          | HZ4870-240                      | HZ4870-24VDC                     | 4,800            | 1,406 | 84              |
| N/A                         | HZ4780                       | HZ4880                          | HZ4880-240                      | HZ4880-24VDC                     | 5,600            | 1,641 | 85              |

## NEMA 4X Hazardous Location Cabinet Cooler Systems

| Cabinet Cooler Only Model # | Continuous Operation Model # | 120V Thermostat Control Model # | 240V Thermostat Control Model # | 24VDC Thermostat Control Model # | Capacity* Btu/Hr | Watts | Sound level dBA |
|-----------------------------|------------------------------|---------------------------------|---------------------------------|----------------------------------|------------------|-------|-----------------|
| HZ4615SS                    | HZ4715SS                     | HZ4815SS                        | HZ4815SS-240                    | HZ4815SS-24VDC                   | 1,000            | 293   | 73              |
| HZ4625SS                    | HZ4725SS                     | HZ4825SS                        | HZ4825SS-240                    | HZ4825SS-24VDC                   | 1,700            | 498   | 80              |
| HZ4630SS                    | HZ4730SS                     | HZ4830SS                        | HZ4830SS-240                    | HZ4830SS-24VDC                   | 2,000            | 586   | 80              |
| HZ4640SS                    | HZ4740SS                     | HZ4840SS                        | HZ4840SS-240                    | HZ4840SS-24VDC                   | 2,800            | 821   | 82              |
| N/A                         | HZ4750SS                     | HZ4850SS                        | HZ4850SS-240                    | HZ4850SS-24VDC                   | 3,400            | 997   | 84              |
| N/A                         | HZ4760SS                     | HZ4860SS                        | HZ4860SS-240                    | HZ4860SS-24VDC                   | 4,000            | 1,171 | 84              |
| N/A                         | HZ4770SS                     | HZ4870SS                        | HZ4870SS-240                    | HZ4870SS-24VDC                   | 4,800            | 1,406 | 84              |
| N/A                         | HZ4780SS                     | HZ4880SS                        | HZ4880SS-240                    | HZ4880SS-24VDC                   | 5,600            | 1,641 | 85              |

\*Cooling capacity at 100 PSIG (6.9 BAR) supply pressure.

| Accessories and Components |                                                                                    |
|----------------------------|------------------------------------------------------------------------------------|
| Model #                    | Description                                                                        |
| 902019                     | Hazloc Solenoid NEMA Type 4X/7/9, 1/4 NPT, 120V/60HZ                               |
| 902020                     | Hazloc Solenoid NEMA Type 4X/7/9, 1/4 NPT, 240V/60HZ                               |
| 902021                     | Hazloc Solenoid NEMA Type 4X/7/9, 1/4 NPT, 24VDC                                   |
| 9017                       | Thermostat only 24V-240V, 50/60 Hz                                                 |
| 9004                       | Automatic Drain Filter Separator, 1/4 NPT, 43 SCFM (1,359 SLPM)                    |
| 9027                       | Oil Removal Filter for all HazLoc Systems, 7-24 SCFM (198-680 SLPM), 1/4 NPT       |
| 9005                       | Oil Removal Filter for all HazLoc Systems, 15-37 SCFM (425-1,048 SLPM), 3/8 NPT    |
| 9006                       | Oil Removal Filter for all HazLoc Systems, 50-150 SCFM (1,416-4,248 SLPM), 3/4 NPT |

# ATEX Cabinet Cooler® Systems



For use with classified  
enclosure purge and  
pressurization systems

## Zones 2 and 22

- Ex II 3 G Ex h IIC T3 Gc
- Ex II 3 D Ex h IIC T200°C Dc



## What is an ATEX Cabinet Cooler System?

ATEX Cabinet Cooler Systems are engineered and approved for use upon purged electrical enclosures (not included) found within ATEX zoned areas. The areas approved are Zone 2 and 22. EXAIR's ATEX Cabinet Cooler Systems have been tested by UL and meet the stringent ATEX requirements for these areas. Cabinet Cooler systems are a low cost and reliable way to cool purged electric control panels found within these environments. They utilize vortex tube technology to produce up to 5,600 Btu/Hr, with no moving parts, which additionally creates a low maintenance solution for cooling your ATEX purged cabinets.

The compact Cabinet Cooler is an easy-to-use air conditioner that can be installed in minutes through a standard electrical knockout. Aluminum and Stainless Steel ATEX Cabinet Coolers that match the NEMA rating of the enclosure are available in many cooling capacities for large and small control panels.

## Advantages

- Rated for Zones 2 and 22
- Available in 8 different cooling capacities
- No moving parts, low maintenance
- Thermostat control reduces operating cost
- Large range of cooling capacities up to 5,600 Btu/hr
- 5 Year warranty
- Low cost

## Why EXAIR ATEX Cabinet Coolers?

EXAIR's ATEX Cabinet Cooler Systems have been set apart from the competition by being certified for Zone 2 and 22 environments. Thermostatically controlled systems are recommended for the highest efficiency and include ATEX approved solenoids, also for hazardous environments. EXAIR Cabinet Cooler Systems will install upon your purged enclosure in minutes, require little to no maintenance and operate under the toughest of industrial conditions. If you require low cost, ease of use and/or reliability – an ATEX Cabinet Cooler System will meet your needs.

EXAIR ATEX Cabinet Cooler Systems are available in 8 different cooling capacities from 1,000 Btu/hr. to 5,600 Btu/hr. This range of cooling allows for choosing the best fit for your cooling needs without wasting compressed air.


Cabinet Cooler Systems protect your electronics from heat, dirt and moisture and keep your processes running. They are the low-cost solution to messy, high maintenance coolant-based air conditioners with simple installation. With modern technology comes an increased number of small electronic components packed into smaller electronic cabinets. This creates a high internal heat load which increases failures due to heat. Components will fail, sensors will misread, controls can drift and displays become inaccurate. EXAIR ATEX Cabinet Coolers can solve these problems and prevent lost productivity, shutdown and the expense of new components.

## Thermostat Control

Each EXAIR ATEX Cabinet Cooler System is available with a thermostat control or as a continuous operation system. Each of these systems will include a water-dirt filter separator to prevent water condensate and dirt from entering your enclosure and cold air distribution kit used to direct the air for circulation and onto hot spots. ATEX

Cabinet Cooler Systems are also available in Type 303 and Type 316SS for highly corrosive environments.

Any control systems and accessories not rated for the ATEX zone need to be moved outside of the ATEX zone or inside a properly purged and pressurized enclosure which is suitable for the ATEX zone.

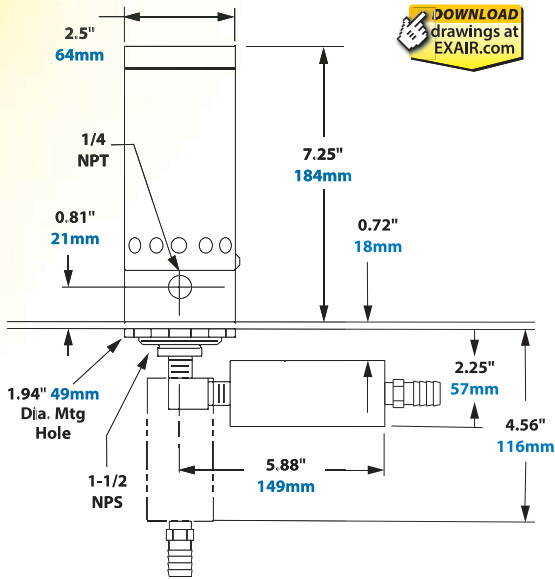

## Safety

EXAIR's ATEX Cabinet Cooler Systems are not purged and pressurized control systems and should not be relied upon nor used in place of a purged and pressurized controller. They are meant for use in conjunction with a purged and pressurized control system.

| Model # s Aluminum |          |
|--------------------|----------|
| ATEX4615           | ATEX4730 |
| ATEX4625           | ATEX4740 |
| ATEX4630           | ATEX4815 |
| ATEX4640           | ATEX4825 |
| ATEX4715           | ATEX4830 |
| ATEX4725           | ATEX4840 |

| Model # s St. Steel |            |
|---------------------|------------|
| ATEX4615SS          | ATEX4730SS |
| ATEX4625SS          | ATEX4740SS |
| ATEX4630SS          | ATEX4815SS |
| ATEX4640SS          | ATEX4825SS |
| ATEX4715SS          | ATEX4830SS |
| ATEX4725SS          | ATEX4840SS |



**EXAIR ATEX Cabinet Coolers are suitable for explosive and harsh environments.**

## Aluminum ATEX Cabinet Cooler Systems (maintain NEMA 4 integrity)

| Cabinet Cooler Only Model # | Continuous Operation Model # | 120V                       |                            | 240V                       |                            | 24VDC                      |                            | Capacity* |       | Sound level dBA |
|-----------------------------|------------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|-----------|-------|-----------------|
|                             |                              | Thermostat Control Model # | Thermostat Control Model # | Thermostat Control Model # | Thermostat Control Model # | Thermostat Control Model # | Thermostat Control Model # | Btu/Hr    | Watts |                 |
| ATEX4615                    | ATEX4715                     | ATEX4815                   | ATEX4815-240               | ATEX4815-24VDC             | ATEX4815-24VDC             | ATEX4815-24VDC             | ATEX4815-24VDC             | 1,000     | 293   | 73              |
| ATEX4625                    | ATEX4725                     | ATEX4825                   | ATEX4825-240               | ATEX4825-24VDC             | ATEX4825-24VDC             | ATEX4825-24VDC             | ATEX4825-24VDC             | 1,700     | 498   | 80              |
| ATEX4630                    | ATEX4730                     | ATEX4830                   | ATEX4830-240               | ATEX4830-24VDC             | ATEX4830-24VDC             | ATEX4830-24VDC             | ATEX4830-24VDC             | 2,000     | 586   | 80              |
| ATEX4640                    | ATEX4740                     | ATEX4840                   | ATEX4840-240               | ATEX4840-24VDC             | ATEX4840-24VDC             | ATEX4840-24VDC             | ATEX4840-24VDC             | 2,800     | 821   | 82              |
| N/A                         | ATEX4750                     | ATEX4850                   | ATEX4850-240               | ATEX4850-24VDC             | ATEX4850-24VDC             | ATEX4850-24VDC             | ATEX4850-24VDC             | 3,400     | 997   | 84              |
| N/A                         | ATEX4770                     | ATEX4860                   | ATEX4860-240               | ATEX4860-24VDC             | ATEX4860-24VDC             | ATEX4860-24VDC             | ATEX4860-24VDC             | 4,000     | 1,171 | 84              |
| N/A                         | ATEX4770                     | ATEX4870                   | ATEX4870-240               | ATEX4870-24VDC             | ATEX4870-24VDC             | ATEX4870-24VDC             | ATEX4870-24VDC             | 4,800     | 1,406 | 84              |
| N/A                         | ATEX4780                     | ATEX4880                   | ATEX4880-240               | ATEX4880-24VDC             | ATEX4880-24VDC             | ATEX4880-24VDC             | ATEX4880-24VDC             | 5,600     | 1,641 | 85              |

## Stainless Steel ATEX Cabinet Cooler Systems (maintain NEMA 4X integrity)

| Cabinet Cooler Only Model # | Continuous Operation Model # | 120V                       |                            | 240V                       |                            | 24VDC                      |                            | Capacity* |       | Sound level dBA |
|-----------------------------|------------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|-----------|-------|-----------------|
|                             |                              | Thermostat Control Model # | Thermostat Control Model # | Thermostat Control Model # | Thermostat Control Model # | Thermostat Control Model # | Thermostat Control Model # | Btu/Hr    | Watts |                 |
| ATEX4615SS                  | ATEX4715SS                   | ATEX4815SS                 | ATEX4815SS-240             | ATEX4815SS-24VDC           | ATEX4815SS-24VDC           | ATEX4815SS-24VDC           | ATEX4815SS-24VDC           | 1,000     | 293   | 73              |
| ATEX4625SS                  | ATEX4725SS                   | ATEX4825SS                 | ATEX4825SS-240             | ATEX4825SS-24VDC           | ATEX4825SS-24VDC           | ATEX4825SS-24VDC           | ATEX4825SS-24VDC           | 1,700     | 498   | 80              |
| ATEX4630SS                  | ATEX4730SS                   | ATEX4830SS                 | ATEX4830SS-240             | ATEX4830SS-24VDC           | ATEX4830SS-24VDC           | ATEX4830SS-24VDC           | ATEX4830SS-24VDC           | 2,000     | 586   | 80              |
| ATEX4640SS                  | ATEX4740SS                   | ATEX4840SS                 | ATEX4840SS-240             | ATEX4840SS-24VDC           | ATEX4840SS-24VDC           | ATEX4840SS-24VDC           | ATEX4840SS-24VDC           | 2,800     | 821   | 82              |
| N/A                         | ATEX4750SS                   | ATEX4850SS                 | ATEX4850SS-240             | ATEX4850SS-24VDC           | ATEX4850SS-24VDC           | ATEX4850SS-24VDC           | ATEX4850SS-24VDC           | 3,400     | 997   | 84              |
| N/A                         | ATEX4760SS                   | ATEX4860SS                 | ATEX4860SS-240             | ATEX4860SS-24VDC           | ATEX4860SS-24VDC           | ATEX4860SS-24VDC           | ATEX4860SS-24VDC           | 4,000     | 1,171 | 84              |
| N/A                         | ATEX4770SS                   | ATEX4870SS                 | ATEX4870SS-240             | ATEX4870SS-24VDC           | ATEX4870SS-24VDC           | ATEX4870SS-24VDC           | ATEX4870SS-24VDC           | 4,800     | 1,406 | 84              |
| N/A                         | ATEX4780SS                   | ATEX4880SS                 | ATEX4880SS-240             | ATEX4880SS-24VDC           | ATEX4880SS-24VDC           | ATEX4880SS-24VDC           | ATEX4880SS-24VDC           | 5,600     | 1,641 | 85              |

\*Cooling capacity at 100 PSIG (6.9 BAR) supply pressure.

| Accessories and Components |                                                                                  |
|----------------------------|----------------------------------------------------------------------------------|
| Model #                    | Description                                                                      |
| 902380                     | ATEX Solenoid, IP65, 1/4 NPT, 120V/60HZ                                          |
| 902381                     | ATEX Solenoid, IP65, 1/4 NPT, 240V/60HZ                                          |
| 902382                     | ATEX Solenoid, IP65, 1/4 NPT, 24VDC                                              |
| 9017                       | Thermostat only 24V-240V, 50/60 Hz                                               |
| 9001                       | Automatic Drain Filter Separator, 3/8 NPT, 65 SCFM (1,841 SLPM)                  |
| 9004                       | Automatic Drain Filter Separator, 1/4 NPT, 43 SCFM (1,359 SLPM)                  |
| 9032                       | Automatic Drain Filter Separator, 1/2 NPT, 90 SCFM (2,549 SLPM)                  |
| 9027                       | Oil Removal Filter for all ATEX Systems, 7-24 SCFM (198-680 SLPM), 1/4 NPT       |
| 9005                       | Oil Removal Filter for all ATEX Systems, 15-37 SCFM (425-1,048 SLPM), 3/8 NPT    |
| 9006                       | Oil Removal Filter for all ATEX Systems, 50-150 SCFM (1,416-4,248 SLPM), 3/4 NPT |